

## 62-3/62-3F Hand Cutting Torch

- Use with 6290 & 6290-NX Tips
- Conformity with EN ISO 5172



### Features :

- HARRIS style
- Heavy duty cutting - up to 300 mm steel
- Triangular stainless steel gas tubes for maximum strength
- Two stainless steel needle valves for fast, accurate flame adjustment
- Head mixing for maximum operator safety
- Built-in safety plug in torch head
- Universal pressure-maintains
- Stable preheat flame during cutting
- Ease-on feature for cutting

### Specifications :

#### OXY-ACETYLENE

90° Head	70° Head	180° Head	Length (mm)
62-3	62-3A	62-3B	460
62-3L	62-3AL	62-3BL	530
62-3L (835)	62-3AL (835)	62-3BL (835)	835
62-3L (1000)	62-3AL (1000)	62-3BL (1000)	1000
62-3L (1250)	62-3AL (1250)	62-3BL (1250)	1250
62-3L (1500)	62-3AL (1500)	62-3BL (1500)	1500
62-3L (1800)	62-3AL (1800)	62-3BL (1800)	1800

#### OXY-PROPANE

90° Head	70° Head	180° Head	Length (mm)
62-3F	62-3AF	62-3BF	460
62-3FL	62-3AFL	62-3BFL	530
62-3FL (835)	62-3AFL (835)	62-3BFL (835)	835
62-3FL (1000)	62-3AFL (1000)	62-3BFL (1000)	1000
62-3FL (1250)	62-3AFL (1250)	62-3BFL (1250)	1250
62-3FL (1500)	62-3AFL (1500)	62-3BFL (1500)	1500
62-3FL (1800)	62-3AFL (1800)	62-3BFL (1800)	1800

\*Use 9/16"-18N inlet thread.  
\*\*Available BSP 3/8" and other sizes thread.

## 42-4/42-4F Hand Cutting Torch

- Use with 6290 & 6290-NX Tips
- Conformity with EN ISO 5172



### Features :

- HARRIS style
- Medium duty cutting - up to 200 mm steel
- Triangular stainless steel gas tubes for maximum strength
- Two stainless steel needle valves and tough extruded brass torch handle for long life
- Head mixing for maximum operator safety
- Built-in safety plug in torch head
- Universal pressure-maintains stable Preheat flame during cutting

### Specifications :

#### OXY-ACETYLENE

90° Head	70° Head	Length (mm)
42-4	42-4A	430
42-4L	42-4AL	530
42-4L (835)	42-4AL (835)	835
42-4L (1000)	42-4AL (1000)	1000
42-4L (1200)	42-4AL (1200)	1200

#### OXY-PROPANE


90° Head	70° Head	Length (mm)
42-4F	42-4AF	430
42-4FL	42-4AFL	530
42-4FL (835)	42-4AFL (835)	835
42-4FL (1000)	42-4AFL (1000)	1000
42-4FL (1200)	42-4AFL (1200)	1200

\*Use 9/16"-18N inlet thread.  
\*\*Available BSP 3/8" and other sizes thread.

HARRIS is registered trademarks owned by HARRIS Calorific, Inc, a Lincoln Electric Company.

## 1600 Hand Cutting Torch

- Use with 1-101, 44, GPN & 44 Tips
- Conformity with EN ISO 5172

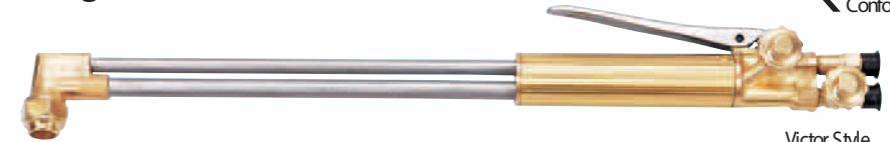

Victor Style



### Features :

- Heavy duty cutting-up to 300 mm steel
- Brass heads are die-forged for extra strength

Stainless steel tube and gas mixing chamber give maximum heat and flashback resistance  
Body and valve are threaded for easy replacement  
This torch combines the spiral and injector principles

### Specifications :

Models	Head	Tips Size	Length (mm)	Compatible Head
1600A	90°	GPN, 1-101	560	VICTOR
1600AB	90°	GPN, 1-101	1000	VICTOR
1600AC	90°	GPN, 1-101	1200	VICTOR
1600AD	90°	GPN, 1-101	1300	VICTOR

Models	Head	Tips Size	Length (mm)	Compatible Head
1600B	90°	TYPE 44, 41	560	CIGWELD
1600E	75°	TYPE 44, 41	460	CIGWELD
1600C	75°	P1567	460	Oxweld
1600CB	75°	P1567	560	Oxweld
1600CC	90°	P1567	460	Oxweld
1600CD	90°	P1567	560	Oxweld

\*Use 9/16"-18N inlet thread.  
\*\*Available G 3/8" and other sizes thread.




VICTOR is registered trademarks owned by VICTOR Equipment Company, a Thermadyne Company.  
CIGWELD is registered trademarks owned by CIGWELD Pty Ltd, a division of Thermadyne Company.

## 1601 Hand Cutting Torch

- Use with ANME & PNME Tips
- Conformity with EN ISO 5172

### Features :

- BRITISH Style
- Heavy duty cutting - up to 300 mm steel
- Stainless steel is used in gas tubes for greater heat resistance and thus resistance to backfire
- Top stainless steel lever w/hold down button
- Die forged brass head for added strength and durability
- Brass or Aluminum handle

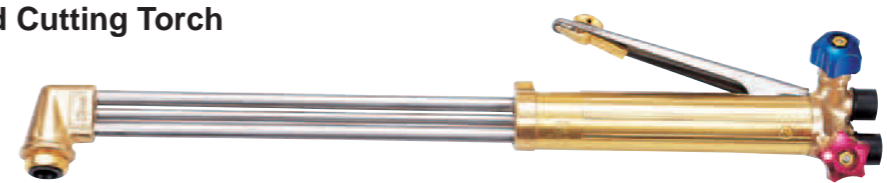

### Specifications :

#### OXY-ACETYLENE

90° Head	75° Head	180° Head	Length (mm)
1601A	1601B	1601C	500
1601AL	1601BL	1601CL	600
1601ALA	1601BLA	1601CLA	700
1601ALB	1601BLB	1601CLB	800

#### OXY-PROPANE

90° Head	75° Head	180° Head	Length (mm)
1601ALC	1601BLC	1601CLC	900
1601ALD	1601BLD	1601CLD	1000
1601ALE	1601BLE	1601CLE	1100
1601ALF	1601BLF	1601CLF	1800

\*Use G 3/8" inlet thread.  
\*\*Available 9/16"-18N and other sizes thread.

- Use with ANME & PNME Tips
- Conformity with EN ISO 5172



### Specifications :

Models	Head	Length(mm)
1602	90°	480
1602A	90°	600
1602B	90°	800
1602C	90°	1000

\*Use G 3/8" inlet thread.  
\*\*Available 9/16"-18N and other sizes thread.

## 1602 Hand Cutting Torch

### Features :

- BRITISH style
- Heavy duty cutting - up to 300 mm steel
- Stainless steel is used in gas tubes for greater heat resistance and thus resistance to backfire
- Die forged brass head for added strength and durability
- Top stainless steel lever for easy job